


BIESSE ACTIVEEDGE 60

Semi automatic edgebanding machine






Minimum size,
maximum performance

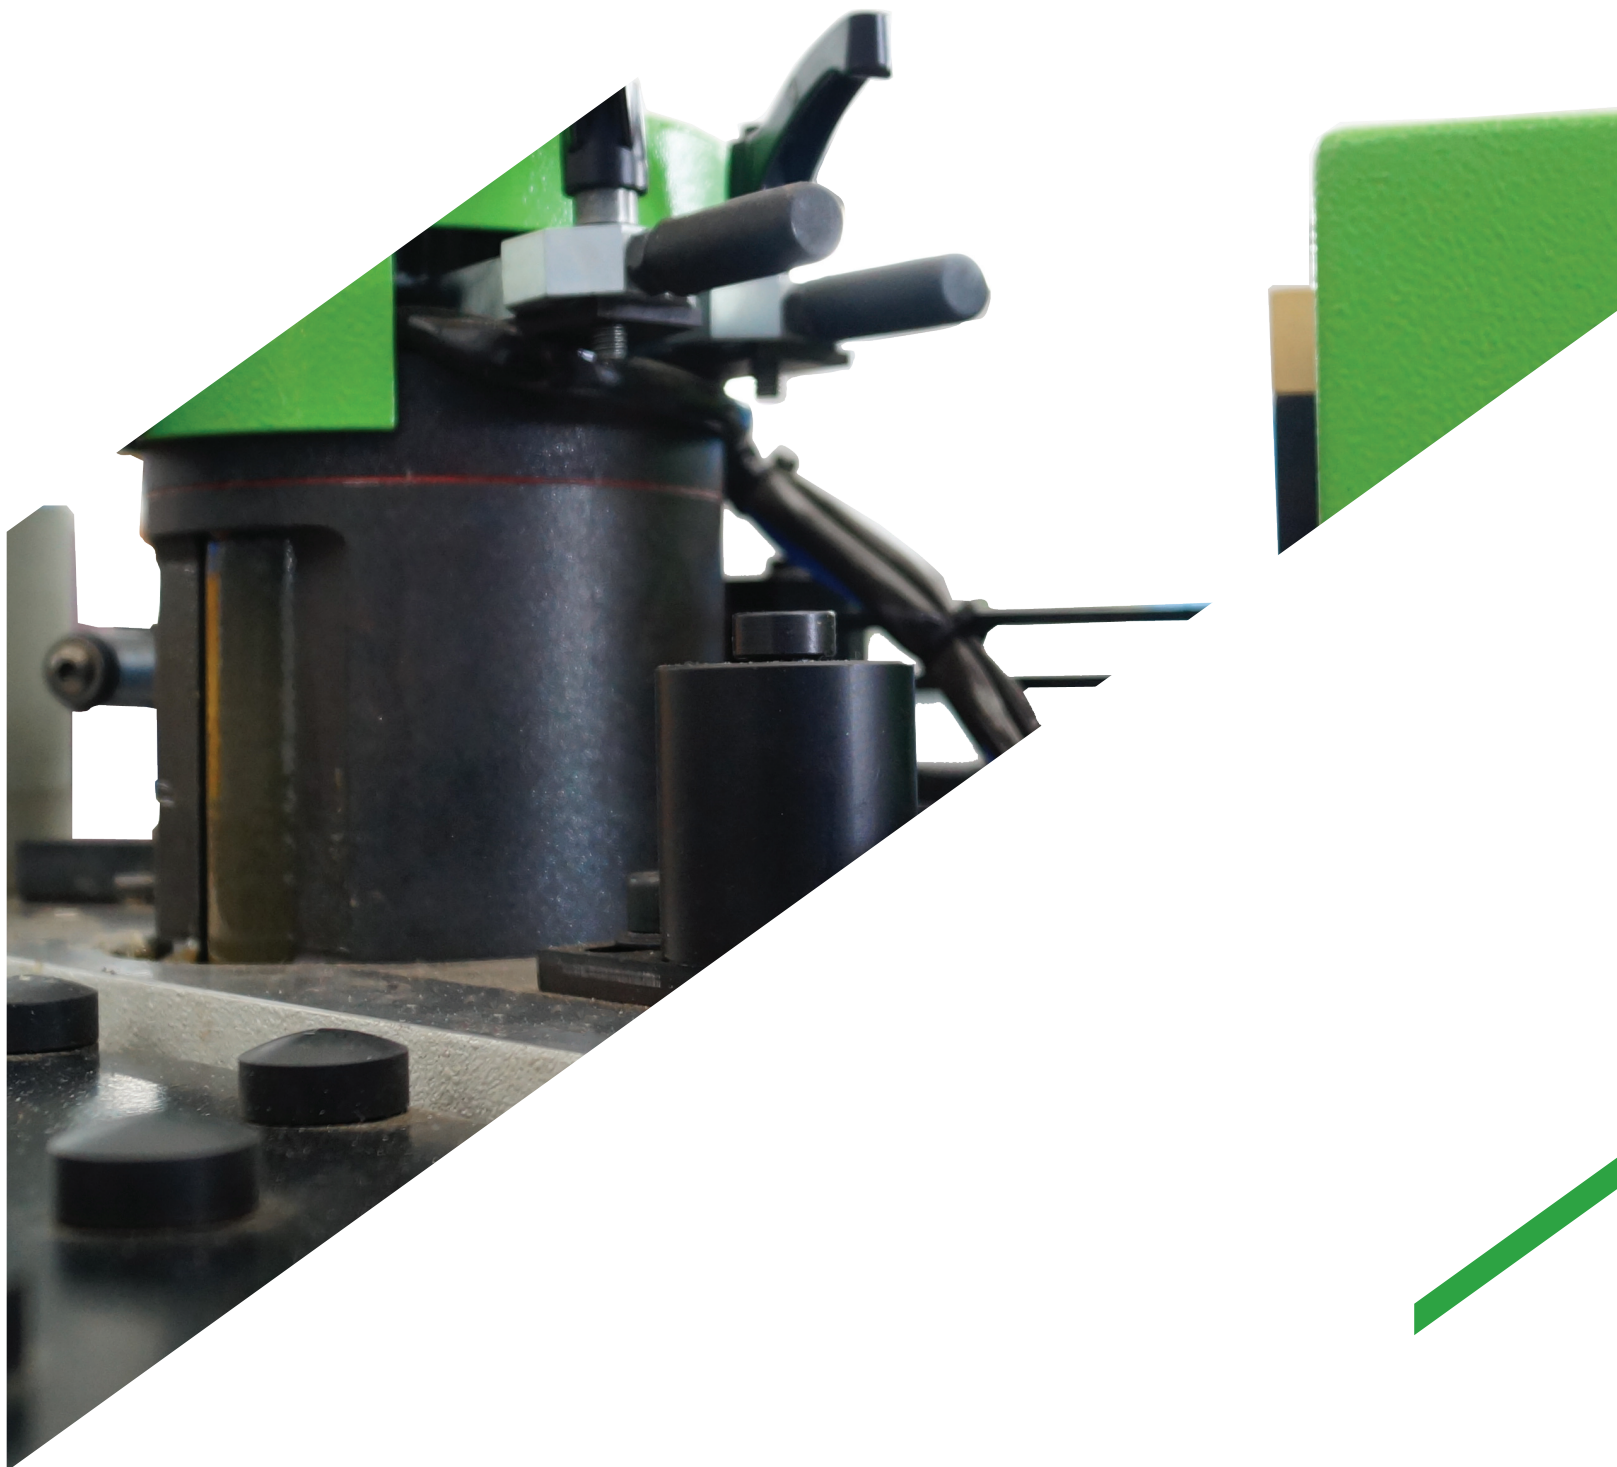

Made In Biesse

Active Edge 60

is the new compact, semi-automatic edge banding machine for straight and shaped panels. It is compact, very simple to operate and maintain.



- ✓ **Dual rollers: dedicated rollers for applying glue on straight and shaped panels**
- ✓ **Dual temperature system: Electronic PID temperature controller**
- ✓ **Quick change from straight edging operation to curved edging operation**
- ✓ **PLC encoder for precise automatic cutting of edges**
- ✓ **Matrix table for easy handling of panels**
- ✓ **Variable speed: 3 - 12 m/min**

Technical specifications

Description	Units
Panel height	10 - 60 mm
Min height of edgebanding material	14 - 64 mm
Thickness of edgebanding material in rolls	0.4 - 3 mm
Min edgebanding radius	25 mm (flat edgebanding 0.4 mm)
Min length of edgebanding material	350 mm
Working speed	3 - 12 m/min
Glue pot capacity	3 kg
Max diameter for edge roller	800 mm
Pneumatic connection	7 bar
Working voltage	400 V / 50Hz 3 phase + neutral